


NETWORK INTERFERENCE SUPPRESSION FPPR - 27S/1 ONE-PHASE FILTER

APPLICATION:


- work voltage 250 VAC, 50/60 Hz,
- two - wired lines,
- attenuation range do 1 Ghz,
- current range 6-24 A,
- to recommend to thyristors rectifier.

Current range	Frequency range Hz	Test voltage PN-E VAC		Passage of current	Weight kg
		1500	1500		
6 A/ 10 A	DC ÷ 400	1500	1500	0,5	2,0
24 A	DC ÷ 60	1500	1500	5	2,0


ELECTRIC DIAGRAM:

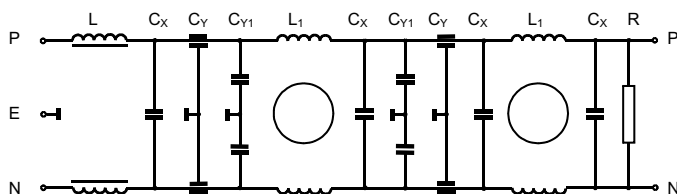

ATTENUATION:

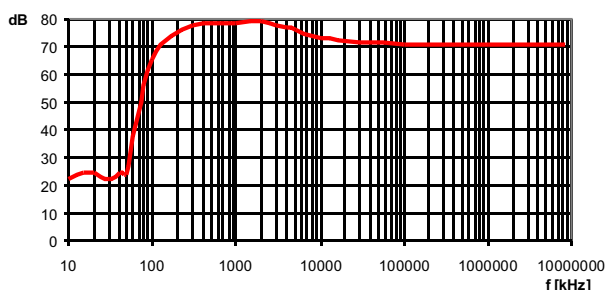

CASING:

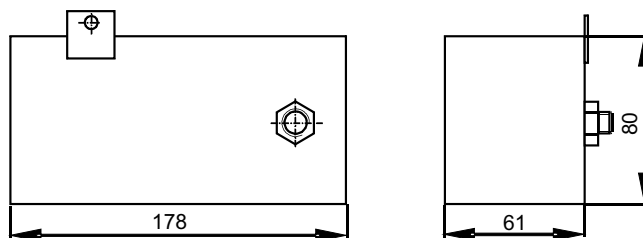

MITRA

Ltd
99-300 Kutno; 1 Grunwaldzka St.
Poland
tel./fax: +48 24 253 60 71
tel. +48 24 355 13 36
<http://www.mitra.com.pl>
e-mail: mitra@mitra.com.pl