

Application:

Self-healing polypropylene metallized dielectric capacitor, was designed as filter capacitor with destination to smooth out pulsating direct voltage.

Technical data:

Rated capacitance

220 μ F

Capacitance tolerance

$\pm 10\%$

Rated voltage

750 VDC

Electric strength:

- between terminals

1000 VDC/2s

- between interconnected terminals and casing

4,0 kVAC/60s

Climatic category


-25°C ÷ 60°C

Sheet steel casing coated a grey paint.

Terminations: screws M6 with nuts.

Impregnant: polyurethane-epoxy composition.

Drawing:

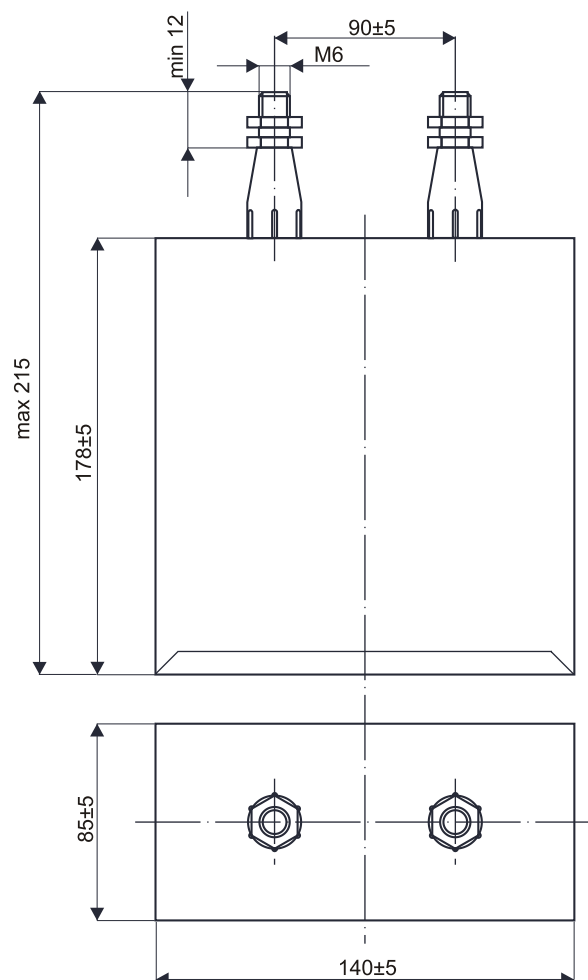

MITRA

Ltd
99-300 Kutno; 1 Grunwaldzka St.
Poland
tel./fax: +48 24 253 60 71
tel. +48 24 355 13 36
<http://www.mitra.com.pl>
e-mail: mitra@mitra.com.pl