

Application:

Self-healing polypropylene metallized dielectric capacitor, was designed as filter capacitor with destination to smooth out pulsating direct voltage.

Technical data:

Rated capacitance

40 μ F

Capacitance tolerance

$\pm 20\%$

Rated voltage

5,3 kVDC

Acceptable working voltage

5,6 kVDC/0,2 min

Electric strength:

- between terminals
- between interconnected terminals and casing

5,6 kVDC/2 s

9,5 kVAC/10 s

Climatic category

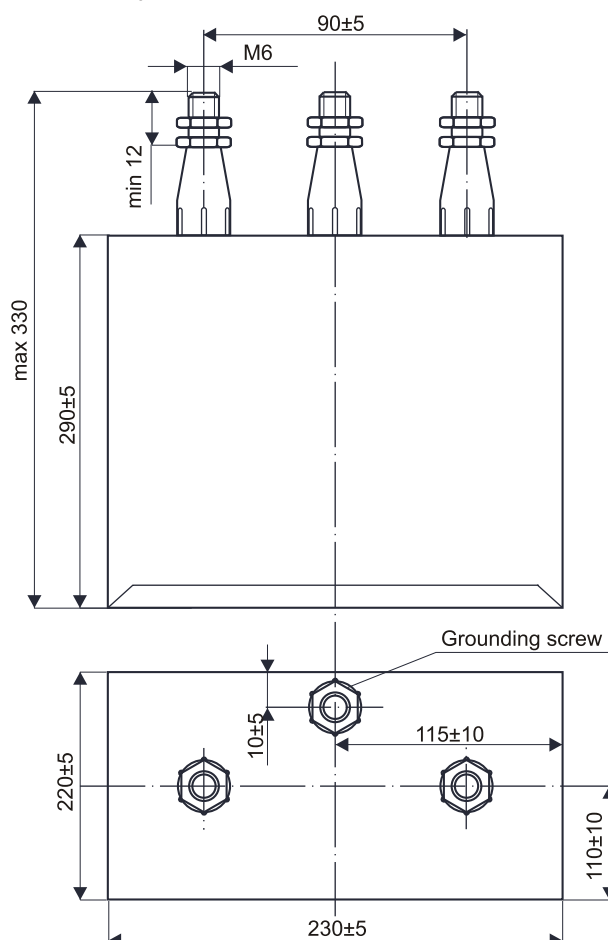
-25°C ÷ +60°C

Sheet steel casing coated a grey paint.

Grounding screw M6 with nuts.

Terminations: screws M6 with nuts.

Impregnant: polyurethane-epoxy composition.

Drawing:

MITRA

Ltd
 99-300 Kutno; 1 Grunwaldzka St.
 Poland
 tel./fax: +48 24 253 60 71
 tel. +48 24 355 13 36
<http://www.mitra.com.pl>
 e-mail: mitra@mitra.com.pl